


Recirculating Media Filters

Proven wastewater treatment technology for residential, commercial, and small community needs

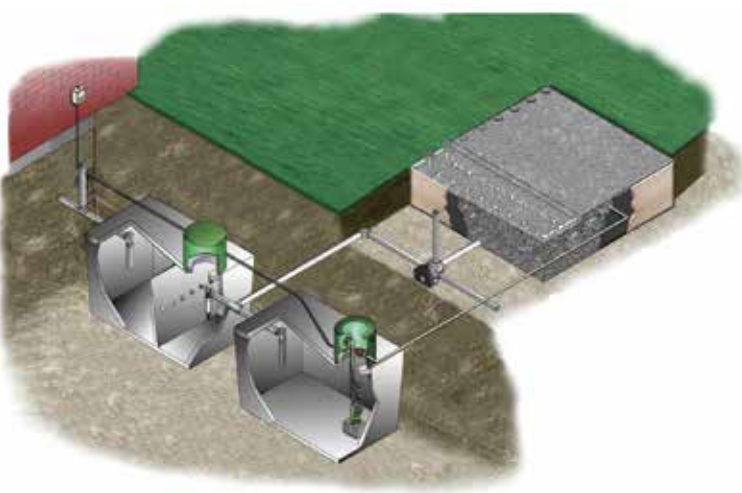

Features


- Produces better than secondary quality effluent
- Recommended 3/8 inch pea gravel media is more dependable than sand
- Size can be adapted to site-specific organic and hydraulic loads
- Proven and reliable technology
- Minimal maintenance requirements
- Individual systems available to treat 450 gpd to 36,000 gpd
- Multiple filter beds can be installed for larger projects
- Custom sizes and designs available, consult factory



Trusted. Tested. Tough.®

zoellerpumps.com 800-928-7867
3649 Cane Run Road, Louisville, KY 40211 USA

3.20.370
CL0062
0121
Supersedes
0119

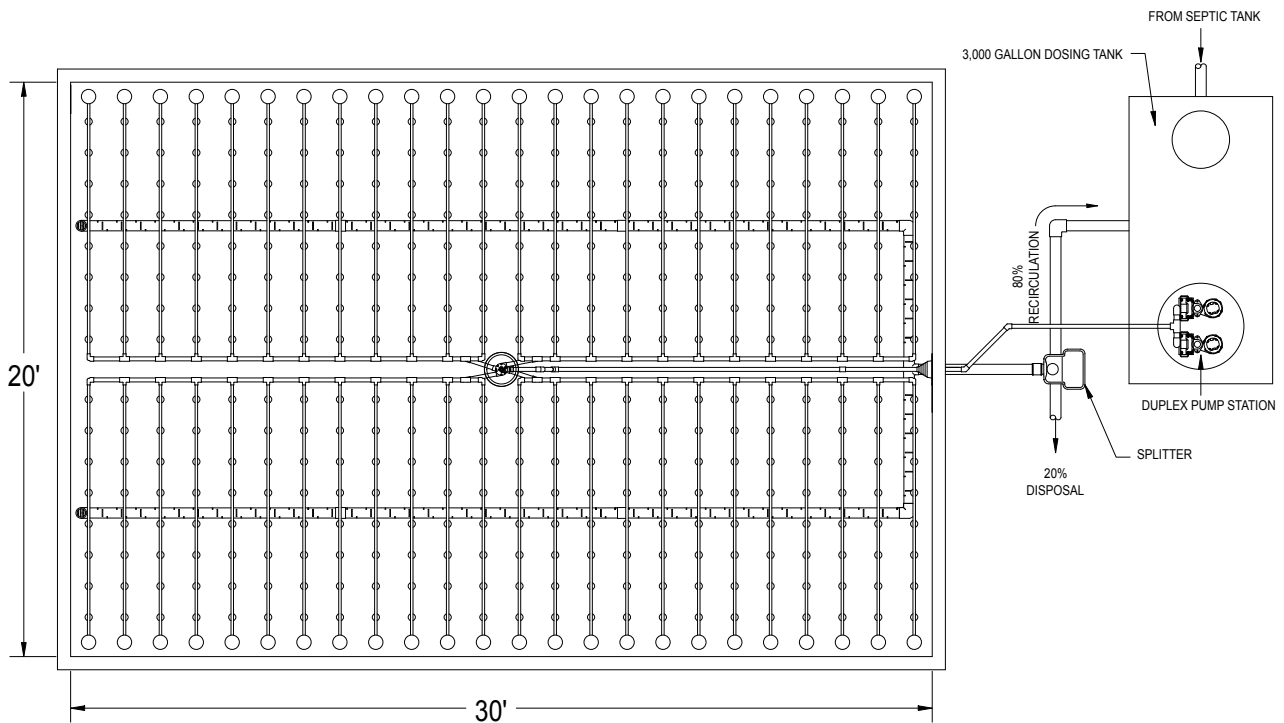

SK2275

Proven wastewater treatment technology for residential, commercial, and small communities.

Recirculating Media Filters	
Part Number	Description
5200-0001	10' x 10' Recirculating media filter kit (450 gpd)
5200-0002	10' x 10' Recirculating media filter kit with pumped discharge (450 gpd)
5200-0003	10' x 15' Recirculating media filter kit (600 gpd)
5200-0004	10' x 15' Recirculating media filter kit with pumped discharge (600 gpd)
5200-0010	20' x 30' Recirculating media filter kit (2400 gpd)
5200-0011	15' x 20' Recirculating media filter kit (1200 gpd)
5200-0012	20' x 20' Recirculating media filter kit (1600 gpd)
5200-0013	10' x 20' Recirculating media filter kit (800 gpd)

Contact Zoeller Pump Company for systems greater than 2,400 gpd. Design assistance available. Custom sizes can be configured for specific projects.