


# MODEL 212



Designed for use in residential or light commercial sewage applications and can be used to transfer groundwater and sewage.



## Sewage Pump




## Features:

- Energy saving product
- 2-year warranty
- Reliable integrated vertical switch
- 1/2 HP 115 V sewage pump
- Performance up to 19.5' TDH
- Flows up to 82 gallons per minute
- Rugged cast iron motor housing
- Engineered plastic base
- Corrosion-resistant, powder coated epoxy paint


**100% factory tested**

### PRODUCT SPECIFICATIONS

<b>MOTOR</b>	Horse Power	1/2
	Voltage	115
	Phase	1 Ph
	Hertz	60 Hz
	RPM	3400
	Type	Permanent split capacitor
	Insulation	Class B
	Amps	6.6
<b>PUMP</b>	Operation	Automatic
	Auto On/Off Points	11 1/2" (29 cm) / 5 1/4" (13 cm)
	Discharge Size	2" NPT
	Solids Handling	2" (50 mm) spherical solids
	Cord Length	10' (3 m) standard
	Cord Type	UL listed 3-prong plug
	Max. Head	19.5' (5.9 m)
	Max. Flow Rate	82 GPM (310 LPM)
	Max. Operating Temp.	104° F (40° C)
	Cooling	Oil filled
	Motor Protection	Auto reset thermal overload (1 Ph)
<b>MATERIALS</b>	Motor Housing	Cast iron
	Pump Housing	Engineered plastic
	Base	Engineered plastic
	Upper Bearing	Ball bearing
	Lower Bearing	Ball bearing
	Mechanical Seals	Carbon and ceramic
	Impeller Type	Non-clogging vortex
	Impeller	Engineered plastic
	Hardware	Stainless steel
	Motor Shaft	SUS420J2 stainless steel
	Gasket	NBR

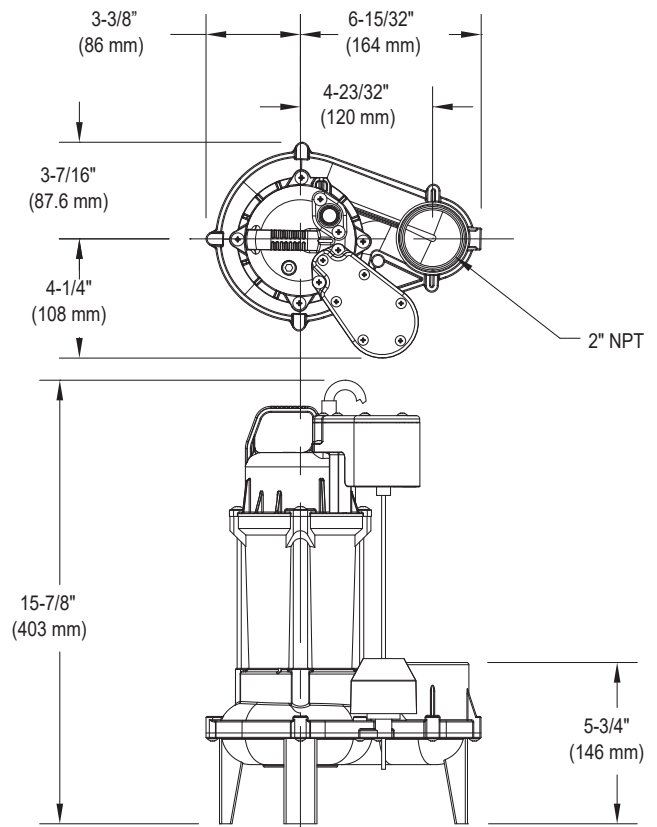

SK3054

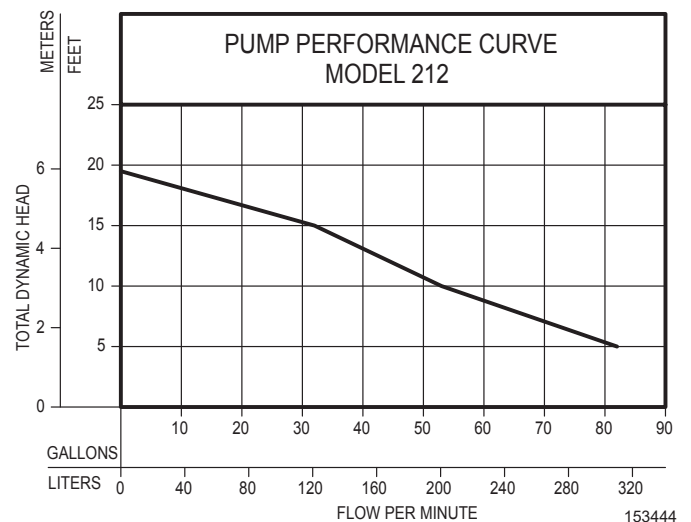

NOTE: The sizing of effluent systems normally requires variable level float(s) controls and properly sized basins to achieve required pumping cycles or dosing timers with nonautomatic pumps.

NOTE: See model comparison chart for specific details.



FM2962  
0123  
Supersedes  
0720

**CAUTION** All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electrical Code (NEC) and the Occupational Safety and Health Act (OSHA).