

MODEL 519



Removes condensation from
air conditioning equipment,
condensing furnaces,
dehumidifiers, ice makers,
water coolers and
refrigeration systems.



Condensate Pump



zoellerpumps.com | 800-928-7867 | 3649 Cane Run Rd., Louisville, KY 40211

Features:


- Handles condensate up to 140 °F (60 °C)
- 20 ft (6.1 m) TDH
- Wall mounts
- Four inlet options
- 3/8" Discharge
- Stainless steel shaft
- Built-in safety switch and check valve
- 6 ft power cord with ground
- Thermally protected
- Option available to include 20' of 3/8" clear tubing
- Available in a low profile model - see FM3266 for details

100% factory tested

TOTAL DYNAMIC HEAD FLOW PER HOUR

MODEL		519	
Feet	Meters	Gal.	Liters
3	.9	110	416
6	1.8	93	352
9	2.7	77	291
12	3.7	59	223
15	4.6	38	144
18	5.5	16	61
Shut-off Head:		20 ft.(6.1m)	

SK858

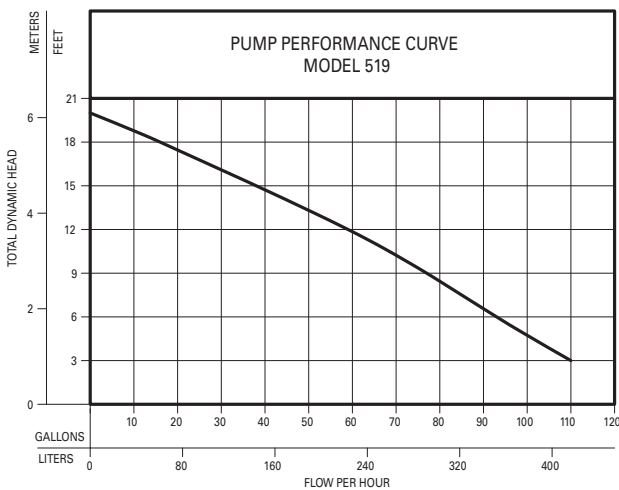

FM3094
0123
Supersedes
0422



All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electrical Code (NEC) and the Occupational Safety and Health Act (OSHA).